




## Product Data Sheet

### **DuPont™ AmberTec™ UP4000Pd OH Ion Exchange Resin**

Semiconductor Grade, Uniform Particle Size, Palladium-doped Strong Base Anion Exchange Resin

#### **Description**

DuPont™ AmberTec™ UP4000Pd OH Ion Exchange Resin is a semiconductor-grade, uniform particle size, palladium-doped strong base anion exchange resin. It is specifically designed for the reduction of trace  $H_2O_2$  which is generated as by-product by UV oxidation at polishing loop of ultrapure water (UPW) systems in semiconductor manufacturing plants. This resin provides exceptional high space velocity (SV) thanks to the rapid kinetics for reduction reaction.



AmberTec™ UP4000Pd OH has higher purity which helps enable the shorter stabilization time which is critical for UPW application.

#### **Applications**

- $H_2O_2$  reduction in UPW polishing loop
- With  $H_2$  injection, reduction of  $O_2$  in process water or UPW polishing loop
- With membrane degasification (MDG), reduction of  $O_2$  in UPW polishing loop

## Typical Properties

---

### Physical Properties

Copolymer	Styrene-divinylbenzene
Matrix	Gel
Type	Strong base anion
Functional Group	Trimethylammonium
Physical Form	White to yellow, translucent, spherical beads

---

### Chemical Properties

Ionic Form as Shipped	OH <sup>-</sup>
Total Exchange Capacity	≥ 1.10 eq/L (OH <sup>-</sup> form)
Water Retention Capacity	54.0 – 60.0% (OH <sup>-</sup> form)
Ionic Conversion	
OH <sup>-</sup>	≥ 95%
Cl <sup>-</sup>	≤ 0.5%

---

### Particle Size <sup>§</sup>

Particle Diameter	630 ± 50 µm
Uniformity Coefficient	≤ 1.20
< 425 µm	≤ 0.5%
> 1180 µm	≤ 2.0%

---

### Stability

Whole Uncracked Beads	≥ 95%
-----------------------	-------

---

### Density

Shipping Weight	689 g/L
-----------------	---------

---

### Purity

Metals, dry basis

Na	≤ 20 mg/kg
K	≤ 20 mg/kg
Fe	≤ 20 mg/kg
Cu	≤ 5 mg/kg
Ca	≤ 10 mg/kg
Mg	≤ 10 mg/kg
Al	≤ 10 mg/kg
Heavy metals (as Pb)	≤ 10 mg/kg


---

\* 1 BV (Bed Volume) = 1 m<sup>3</sup> solution per m<sup>3</sup> resin or 7.5 gal per ft<sup>3</sup> resin.

## Hydraulic Characteristics

Pressure drop data for DuPont™ AmberTec™ UP4000Pd OH resin in water as a function of service flowrate is shown in Figure 1. Pressure drop data are valid for clean, classified beds which have not been contaminated with suspended solids during the service run; if the bed accumulates solids, the pressure drop will increase.

Figure 1: Pressure Drop

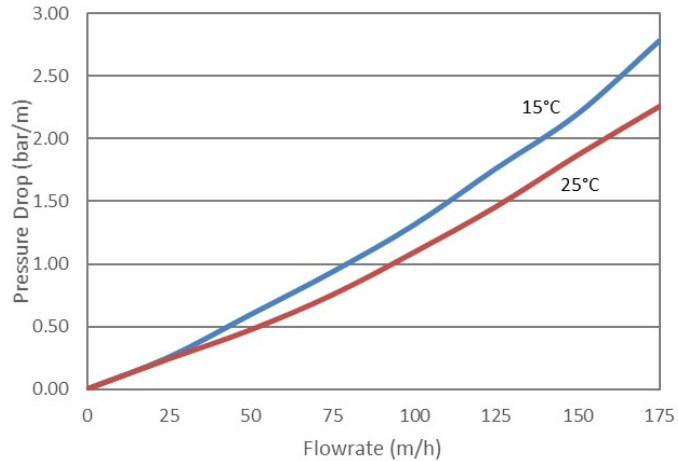


## Quality Assurance

DuPont™ AmberTec™ UP4000Pd OH ion exchange resin is tested by DuPont for resistivity, total organic carbon (TOC), and kinetic performance. This ensures that all batches of AmberTec™ UP4000Pd OH will meet stringent UPW performance requirements on these most critical parameters. DuPont Water Solutions supports the quality performance of AmberTec™ UP4000Pd OH in UPW applications to assure full customer satisfaction with the product as delivered.

Typical rinse curves for resistivity and total organic carbon (TOC) as a function of rinse time based on our quality control procedure for AmberTec™ UP4000Pd OH are shown in Figure 2.

Figure 2: Resistivity and TOC Rinse Performance

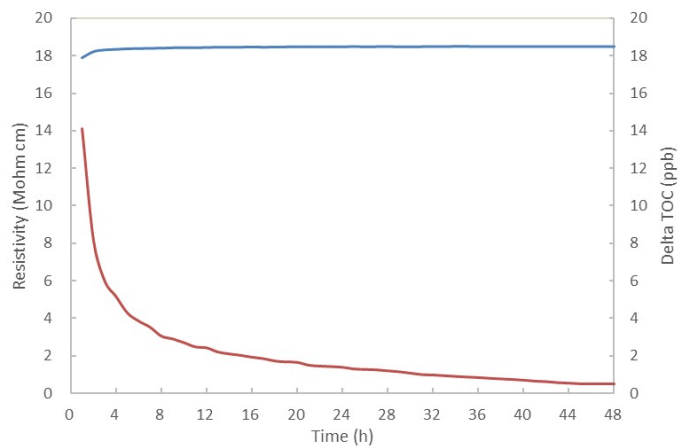

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

## Regulatory Note

This product may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.

Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

© 2021 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.

